

TP-LINK RE200 AC750 WI-FI RANGE EXTENDER




₱23,000.00

- Boosts wireless signal to previously unreachable or hard-to-wire areas flawlessly
 - Compatible with 802.11 b/g/n and 802.11ac Wi-Fi devices
 - Dual band speeds up to 750Mbps
- Miniature size and wall-mounted design make it easy to deploy and move flexibly
- Ethernet port allows the Extender to function as a wireless adapter to connect wired devices

SKU: FSP5666 | **Categories:** [Wireless Range Extenders](#) |

GALLERY IMAGES

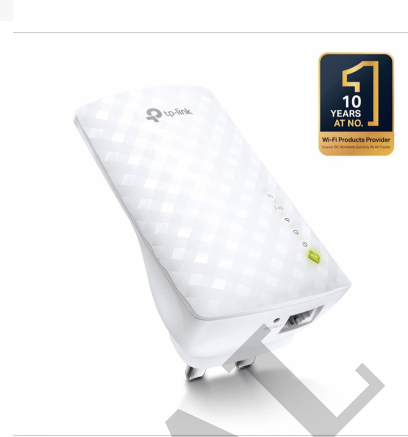

ADDITIONAL INFORMATION

Sync

Interface

[1 x 10/100M Ethernet Port \(RJ45\)](#)

Wireless

CONFIDENTIAL

Frequency	2.4GHz & 5GHz
Signal Rate	2.4GHz:Up to 300Mbps 5GHz:Up to 433Mbps
Working Modes	Range Extender/Access Point 108M: -73dBm@10% PER 11M: -86dBm@8% PER 13.5M: -87dBm@10% PER 130M: -70dBm@10% PER 180M: -64dBm@10% PER 1M: -94dBm@8% PER
Reception Sensitivity	2.4G: 270M: -70dBm@10% PER 29.3M: -83dBm@10% PER 390M: -60dBm@10% PER 5G: 6.5M: -90dBm@10% PER 6M: -92dBm@10% PER 6M□-90dBm@10% PER 78M: -68dBm@10% PER
Transmit Power	< 20 dBm (EIRP)
Wireless Functions	Domain Login Function WMM (Wi-Fi Multimedia)
Wireless Security	64/128/152-bit WEP WPA-PSK / WPA2-PSK
Hardware	
Antenna Type	3 x internal
Buttons	WPS Button, Reset Button
Max Power Consumption	About 6.5W
Standards & Protocol	IEEE802.11ac,IEEE 802.11n, IEEE 802.11g, IEEE 802.11b
Plug Type	EU, UK, US, AU
Dimensions (WxDxH)	4.3x 2.6 x 3.0in. (110.0 x 65.8 x 75.2mm)

Others

Certifications

[CE, FCC, RoHS](#)

Environment

[Operating Humidity: 10%~90% non-condensing](#)
[Operating Temperature: 0°C~40°C \(32°F~104°F\)](#)
[Storage Humidity: 5%~90% non-condensing](#)
[Storage Temperature: -40°C~70°C \(-40°F~158°F\)](#)

Package Contents

[AC750 Wi-Fi Range Extender RE200](#)
[Quick Installation Guide](#)

System Requirements

[Microsoft® Windows® 98SE, NT, 2000, XP, Vista or Windows 7, 8, 10, Mac® OS, NetWare®, UNIX® or Linux.](#)

CONFIDENTIAL

BRAND

TP-Link

IN THE BOX

AC750 Wi-Fi Range Extender RE200
Quick Installation Guide

THERE ARE NO REVIEWS YET.

CONFIDENTIAL

CONFIDENTIAL